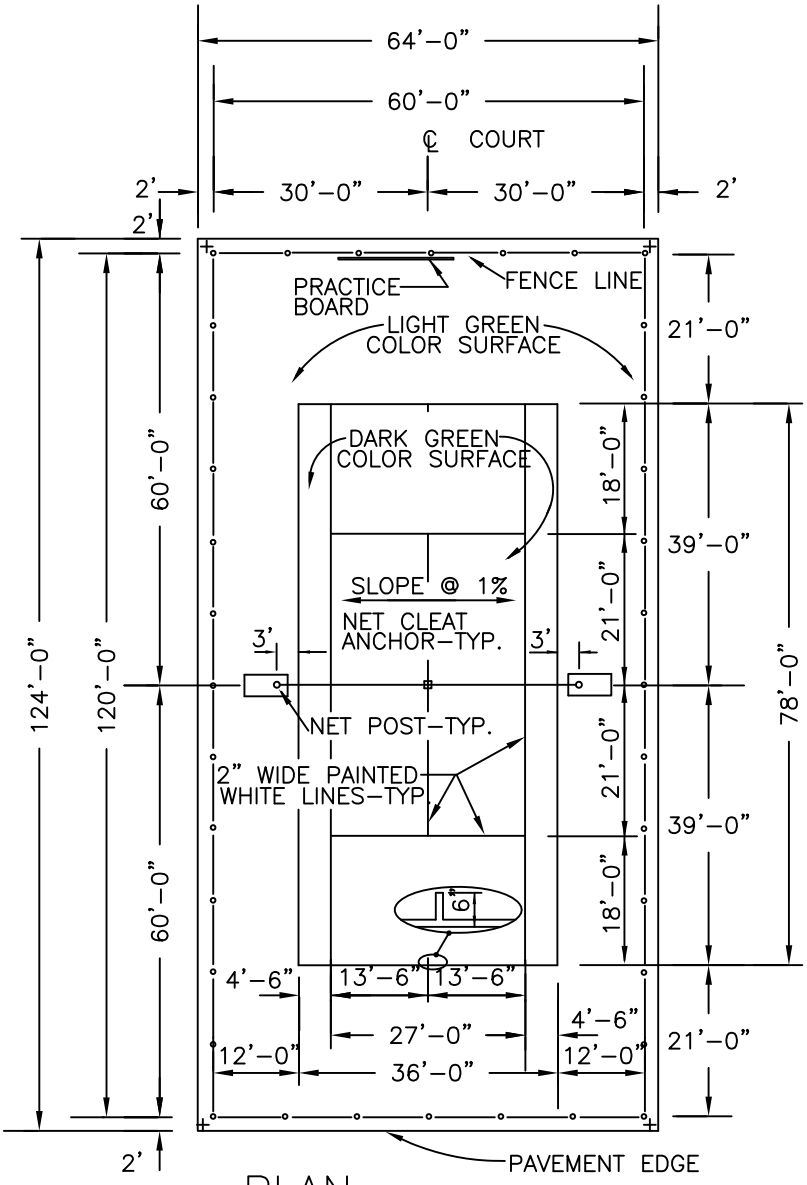

PLAN
N.T.S.

NOTES:

1. PROVIDE 1% SLOPE ACROSS COURT.
2. POINTS OF FINISH ELEVATIONS SHOWN ON SITE PLAN ARE NOTED BY "+".
3. GATES ARE TO BE LOCATED AS SHOWN ON SITE PLAN AND ARE TO SWING OUT.
4. APPLY PROTECTIVE COLORCOATING OVER RE–SURFACER AT RATES SPECIFIED IN SPEC 730.
5. COLORCOAT SURFACE AFTER FENCE AND GATES HAVE BEEN INSTALLED. PROVIDE CHAIN AND LOCK FOR GATES TO PROTECT THE COLORCOATED SURFACE FROM POSSIBLE VANDALISM.
6. ALL MEASUREMENTS FOR LINE STRIPING OF COURTS ARE TO THE OUTSIDE OF LINES, EXCEPT THOSE INVOLVING THE CENTER SERVICE LINE WHICH IS EQUALLY DIVIDED BETWEEN LEFT AND RIGHT SERVICE COURTS.
7. PROVIDE A 10' HIGH BY 12' WIDE PRACTICE BOARD MOUNTED ON THE FENCE AT THE END OF ONE COURT AS DIRECTED.
8. FOR PAVEMENT SECTION AND NET POST ANCHOR DETAILS, SEE STANDARD NO. 203.
9. FOR FENCE AND GATE DETAILS, SEE STANDARD NO. 204 AND 205.

THE MARYLAND-NATIONAL CAPITAL PARK AND PLANNING COMMISSION
Department of Park and Planning, Montgomery County, Maryland

PARK DEVELOPMENT DIVISION
9500 BRUNETT AVENUE
SILVER SPRING, MD 20901

DATE APPROVED
CHIEF ENGINEER
SUPERINTENDENT OF PARKS

SINGLE TENNIS COURT

REVISED	DATE	STANDARD NO.
		202